

FIMER


FIMER – Retrofit

FIMER Switzerland
c/o MARICI Switzerland AG
Etzel matt 1
CH-5430 Wettingen

FIMER

Der weltweit viertgrößte Lieferant von Solarwechselrichtern

Erwerb und Integration
des Solarwechselrichtergeschäfts von
ABB im ersten Quartal 2020

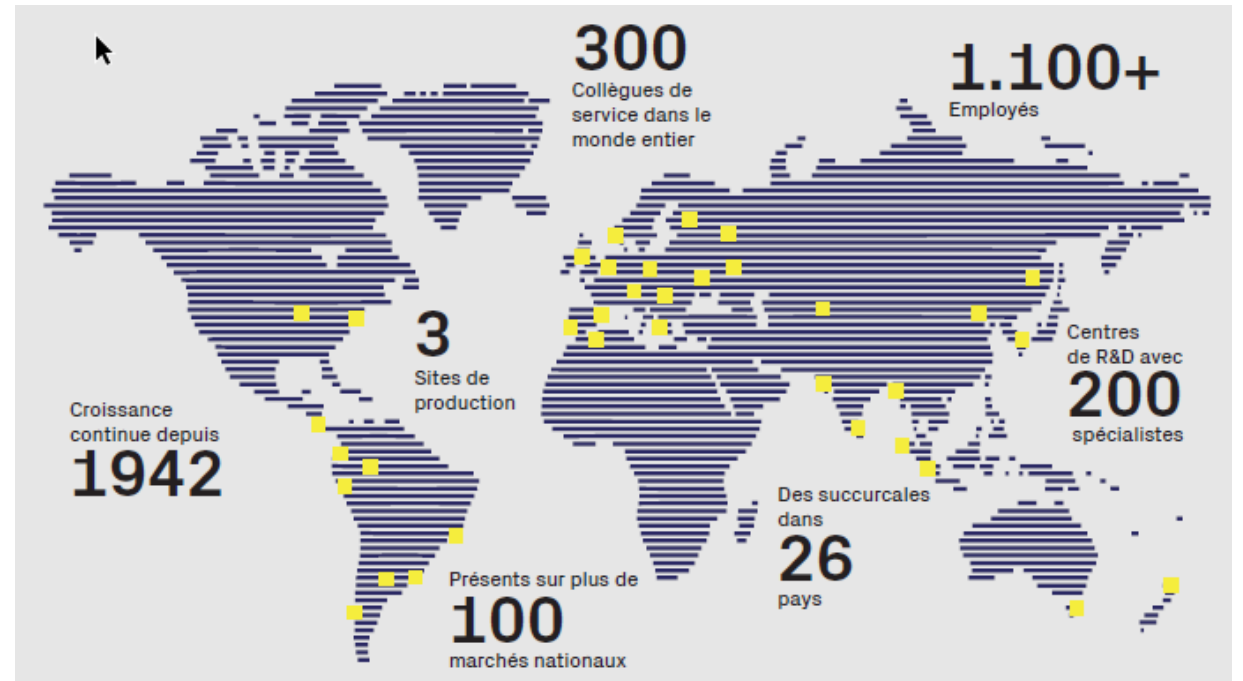

Produkte Übersichte FIMER

«Baby» TRIO 5.8 / 7.5 / 8.5



PVI 10.0 / 12.5



TRIO 20.0/27.6



PVS-50/60




PVS-100/120




FIMER - Servicepasswort


4 Schritt Request Passwort Inverter

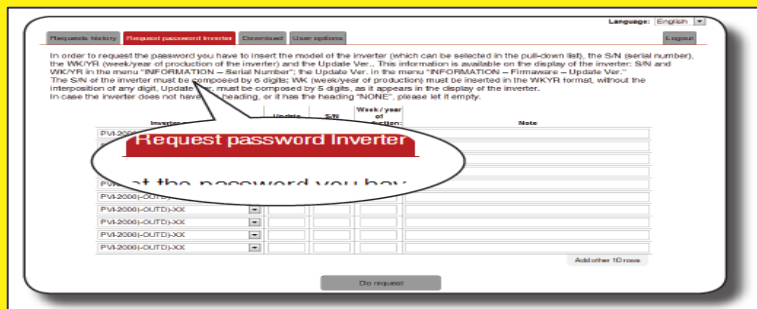

6 Schritt Do Request

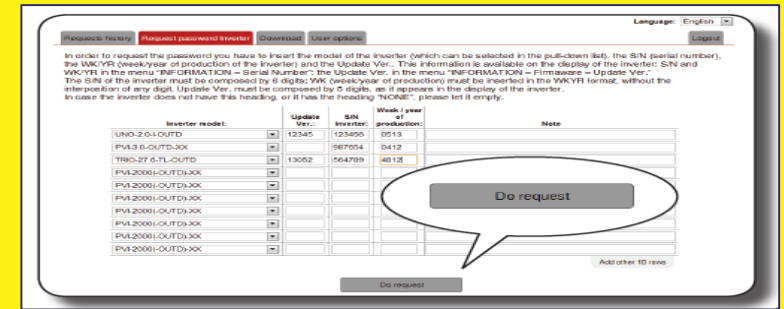

5 Schritt Auswahl Wechselrichter

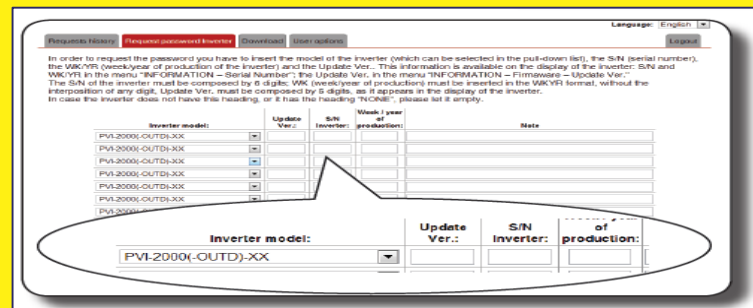


Retrofit „Baby“ TRIO

TRIO-5.8/7.5/8.5
5.8/7.5/8.5 kW




1. Service-Passwörter generieren unter:
<https://registration.solar.fimer.com/>
2. Setzen Sie im Menu *Einstellungen* (Passwort: 0000) -> *Service* -> *Reset Country S.* die 24h Zähler zurück. Dazu benötigen Sie die Service-Passwörter
3. Länder Einstellung neu setzten

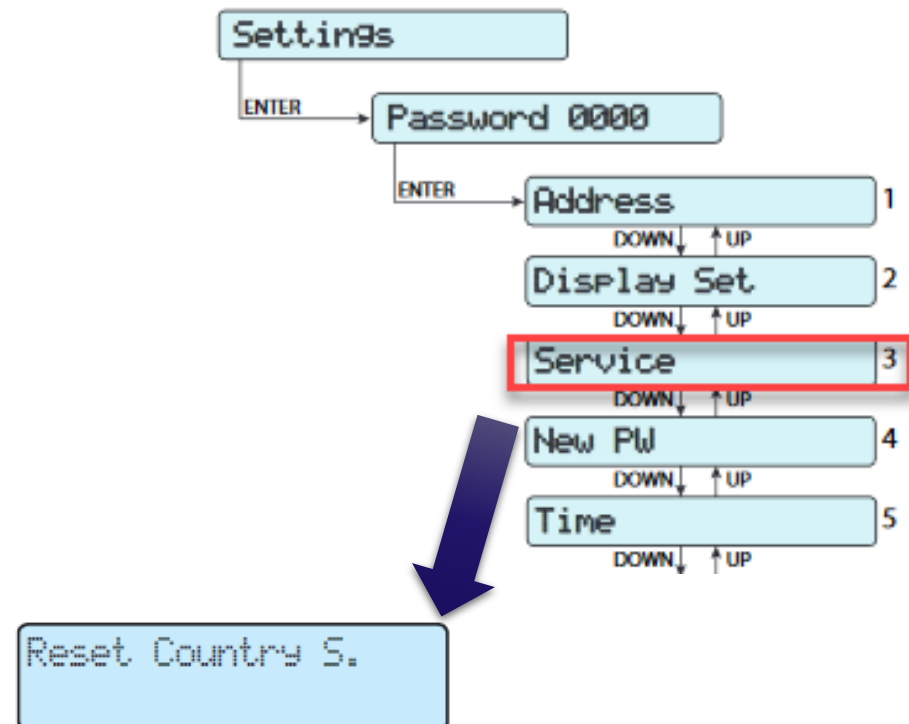

Retrofit „Baby“ TRIO

TRIO-5.8/7.5/8.5
5.8/7.5/8.5 kW

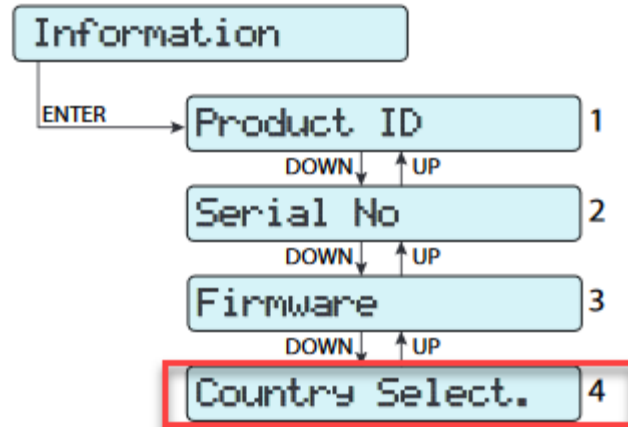

The grid standards that can be selected are listed in the following table:

| Displayed name | Country Grid Standard | Display language |
|----------------|------------------------------------|------------------|
| VDE 0126 | GERMANY-VDE0126@400V | ENGLISH |
| RD 1699 | SPAIN RD1699 @ 400V | SPANISH |
| UK G83 | UK – G83 @ 400V | ENGLISH |
| UK G59 | UK – G59 @ 400V | ENGLISH |
| IRELAND | IRELAND @ 400V | ENGLISH |
| AS 4777 | AUSTRALIA @ 400V | ENGLISH |
| ISRAEL. | ISRAEL @ 400V | ENGLISH |
| FRANCE | FRANCE LL 2013 @ 400V | FRENCH |
| NETHERL. | NETHERLANDS @ 400V | DUTCH |
| GREECE | GREECE @ 400V | ENGLISH |
| PORTUGAL | PORTUGAL @ 400V | ENGLISH |
| CORSICA | CORSICA @ 400V | FRENCH |
| HUNGARY | HUNGARY @ 400V | ENGLISH |
| TAIWAN | TAIWAN @ 400V | ENGLISH |
| CZECH | CHECA Republic @ 400V | CZECH |
| VDE 4105 | GERMANY – VDE AR-N-4105 @ 400V | GERMAN |
| CEI021 EX | ENEL CEI-021 @ 400V EXTERNAL Prot. | ITALIAN |
| CEI021 IN | ENEL CEI-021 @ 400V INTERNAL Prot. | ITALIAN |


Retrofit PVI

PVI-10.0/12.5-TL-OUTD

10.0/12.5 kW




1. Service-Passwörter generieren unter:
<https://registration.solar.fimer.com/>
2. Setzen Sie im Menu *Einstellungen* (Passwort: 0000) -> *Service* -> *Reset Country S.* die 24h Zähler zurück. Dazu benötigen Sie die Service-Passwörter
3. Länder Einstellung neu setzten

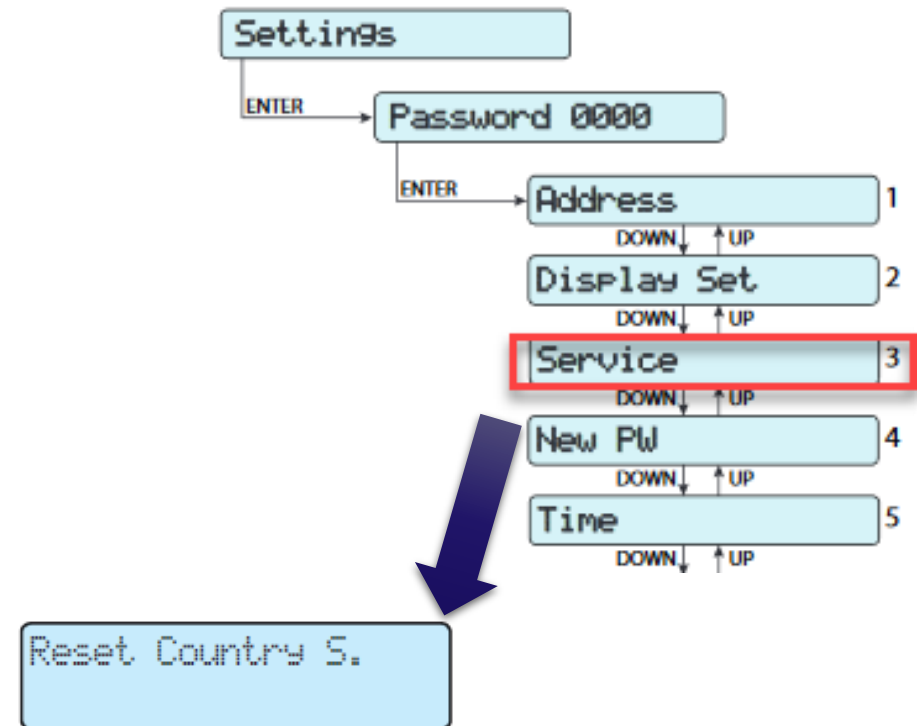

Retrofit PVI

PVI-10.0/12.5-TL-OUTD
10.0/12.5 kW

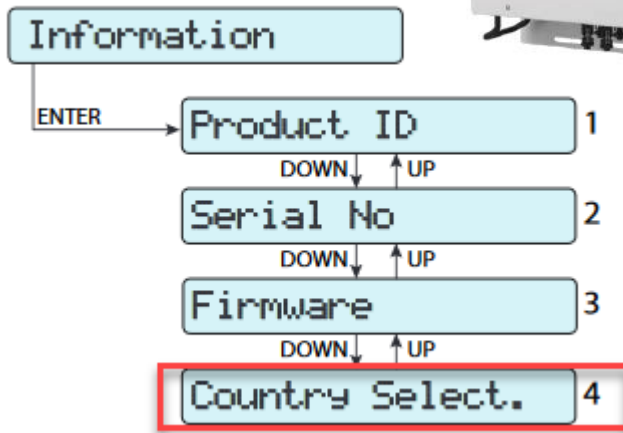

| Displayed name | Display language |
|----------------|------------------|
| SINGAPORE | English |
| THAIL. PEA | English |
| VDE0126 3W | English |
| THAIL. MEA | English |
| FRANCE 14 | French |
| EN50438 | English |
| CEI 016 | Italian |
| TURKEY HV | English |
| SLOVENIA | English |
| ROMANIA | English |
| TURKEY LV | English |
| BRAZIL | English |
| C1011 110 | French |
| C1011 100 | French |
| RD 1565 | Spanish |
| S. AFRICA | English |
| CEI 021 EX. | Italian |
| VDE 4105 | German |


Retrofit Trio Reihe

TRIO-20.0/27.6

20.0/27.6 kW



1. Service-Passwörter generieren unter:
<https://registration.solar.fimer.com/>
2. Setzen Sie im Menu *Einstellungen* (Passwort: 0000) -> *Service* -> *Reset Country S.* die 24h Zähler zurück. Dazu benötigen Sie die Service-Passwörter
3. Länder Einstellung neu setzten und Kontrollieren

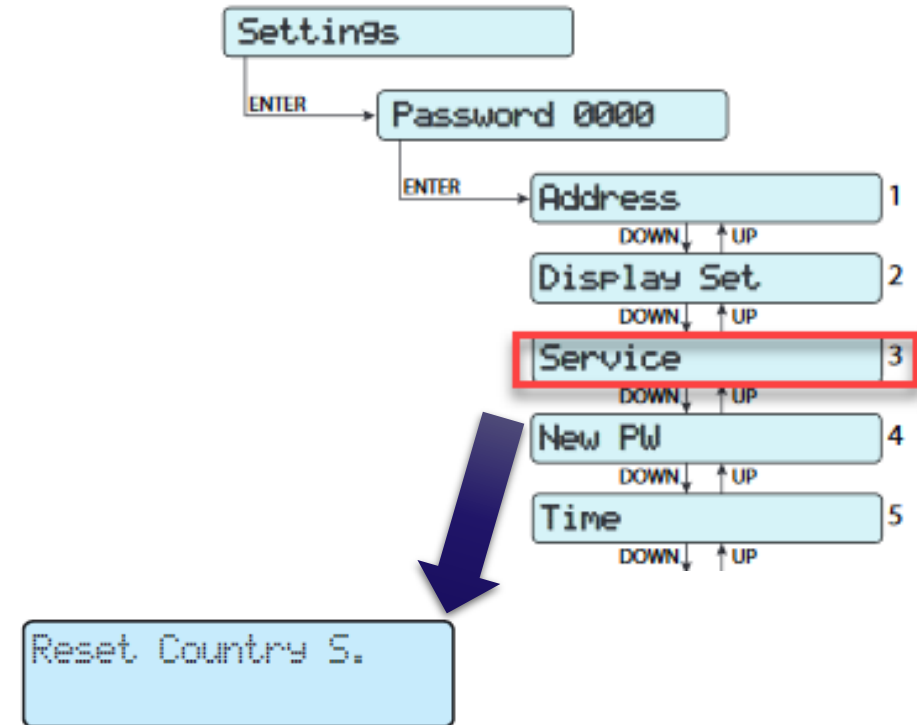

Retrofit Trio Reihe

TRIO-20.0/27.6
20.0/27.6 kW




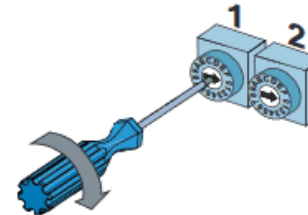


Table: country standard and language

| Switch 1 | Switch 2 | Country Grid Standard | Display language | Displayed name |
|----------|----------|-------------------------------|------------------|----------------|
| 0 | 0 | NON-ASSIGNED | ENGLISH | |
| 0 | 1 | GERMANY VDE 0126 @ 400V | GERMAN | VDE 0126 |
| 0 | 5 | ENEL @ 400V | ITALIAN | ENEL |
| 0 | 6 | SPAIN RD1699 @ 400V | SPANISH | RD 1699 |
| 0 | 8 | UK - G59 @ 400V | ENGLISH | UK G59 |
| 0 | 9 | IRELAND @ 400V | ENGLISH | IRELAND |
| 0 | A | AUSTRALIA @ 400V | ENGLISH | AS 4777 |
| 0 | B | ISRAEL @ 400V | ENGLISH | ISRAEL |
| 0 | C | GERMANY - BDEW @ 400V | GERMAN | BDEW |
| 0 | D | FRANCE @ 400V | FRENCH | FRANCE |
| 0 | E | NETHERLANDS @ 400V | DUTCH | NETHERL. |
| 0 | F | GREECE @ 400V | ENGLISH | GREECE |
| 1 | 0 | PORTUGAL @ 400V | ENGLISH | PORTUGAL |
| 1 | 1 | CORSICA @ 400V | FRENCH | CORSICA |
| 1 | 2 | HUNGARY @ 400V | ENGLISH | HUNGARY |
| 1 | 4 | KOREA @ 380V | ENGLISH | KOREA |
| 1 | 5 | TAIWAN @ 400V | ENGLISH | TAIWAN |
| 1 | 6 | CHECA Republic @ 400V | CZECH | CZECH |
| 1 | 7 | GERMANY-VDE AR-N-4105@400V | GERMAN | VDE 4105 |
| 1 | 8 | CEI-021 @ 400V EXTERNAL Prot. | ITALIAN | CEI021 EX |
| 1 | B | SOUTH AFRICA @ 400V | ENGLISH | S.AFRICA |
| 1 | C | SPAIN RD 1565 @ 400V | SPANISH | RD 1565 |
| 1 | D | BELG C10-11 100% @ 400V | FRENCH | C1011 100 |
| 1 | E | BELG C10-11 110% @ 400V | FRENCH | C1011 110 |
| 1 | F | BRAZIL @ 380V | ENGLISH | BRAZIL |
| 2 | 0 | TURKEY LV @400V | ENGLISH | TURKEY LV |
| 2 | 1 | ROMANIA @400V | ENGLISH | ROMANIA |
| 2 | 2 | SLOVENIA @400V | ENGLISH | SLOVENIA |

Retrofit PVS Reihe und Trio 50-TM

PVS-50/60

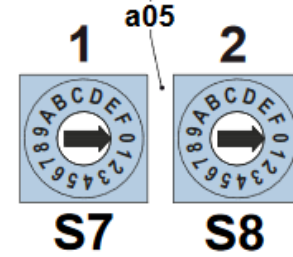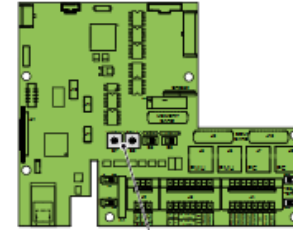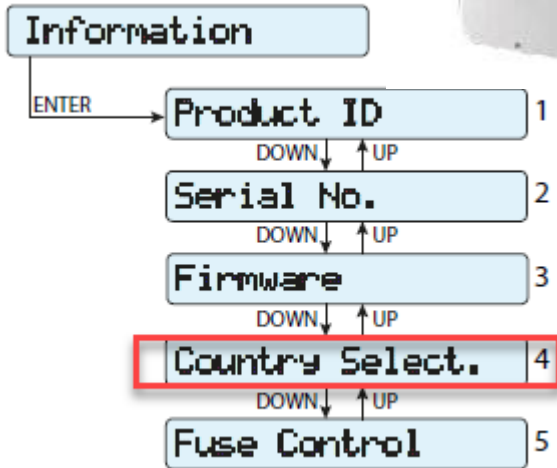

PVS-100/120





1. Admin Plus-Passwörter generieren unter: <https://registration.solar.fimer.com/>
2. Login Web User Interface des Wechselrichters
3. Als Admin Plus einloggen unter den Benutzern
4. Im Service Tool die Länder Einstellung zurücksetzen

Retrofit PVS Reihe und Trio 50-TM

PVS-50/60



PVS-100/120

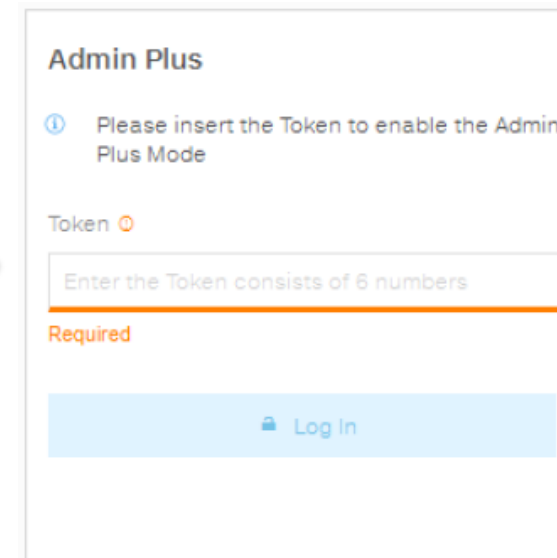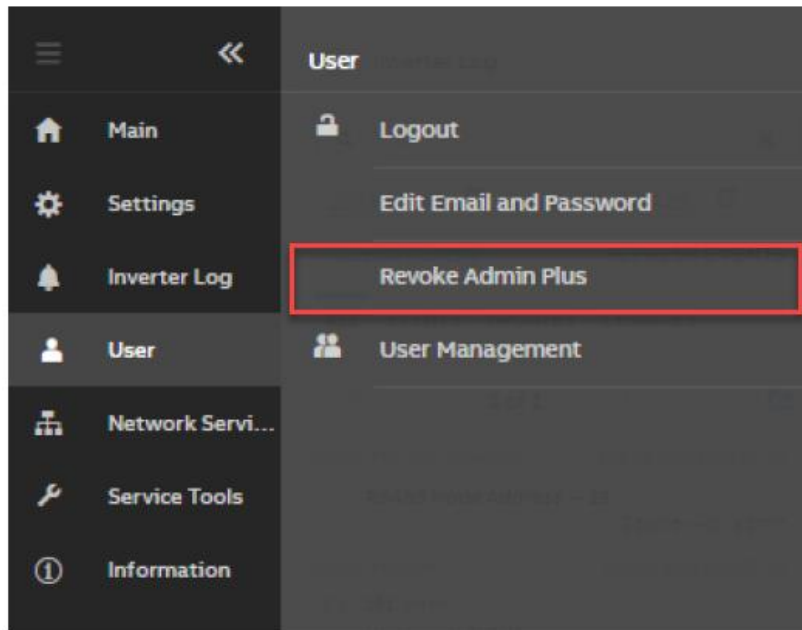


Retrofit PVS Reihe und Trio 50-TM

PVS-50/60



PVS-100/120

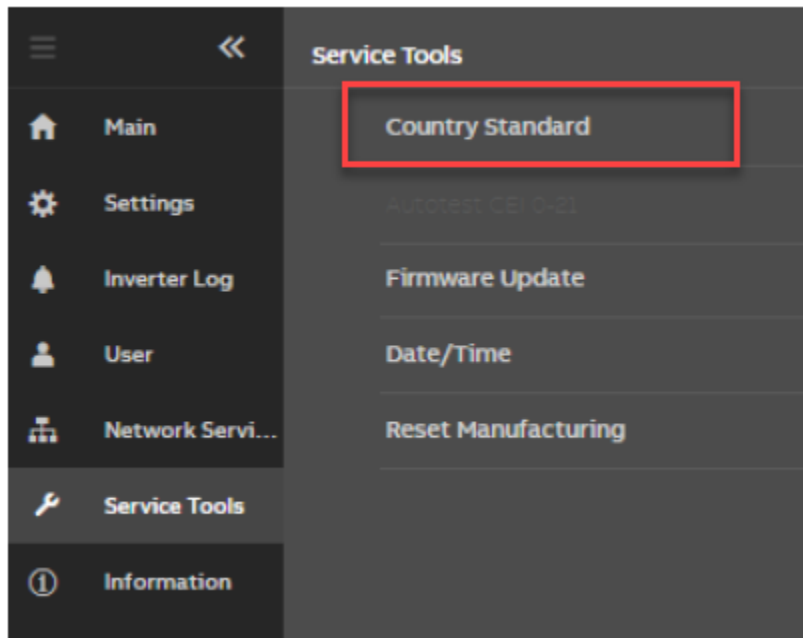

Country standard

i You can change the Grid Standard within the first 24 hours. Afterwards, you can modify it logging in as Admin Plus and pressing the RESET button.

Select The Country Standard (Grid Code)

GERMANY (VDE 4105)-50Hz

SAVE

Vielen Dank

FIMER S.p.A.
Via J. F. Kennedy 26
20871 Vimercate (MB) Italy

Phone: +39 039 98 981
Fax: +39 039 60 79 334

info@fimer.com
fimer.com

FIMER Switzerland
c/o MARICI Switzerland AG
Etzel matt 1
5430 Wettingen
ch-solar@fimer.com